
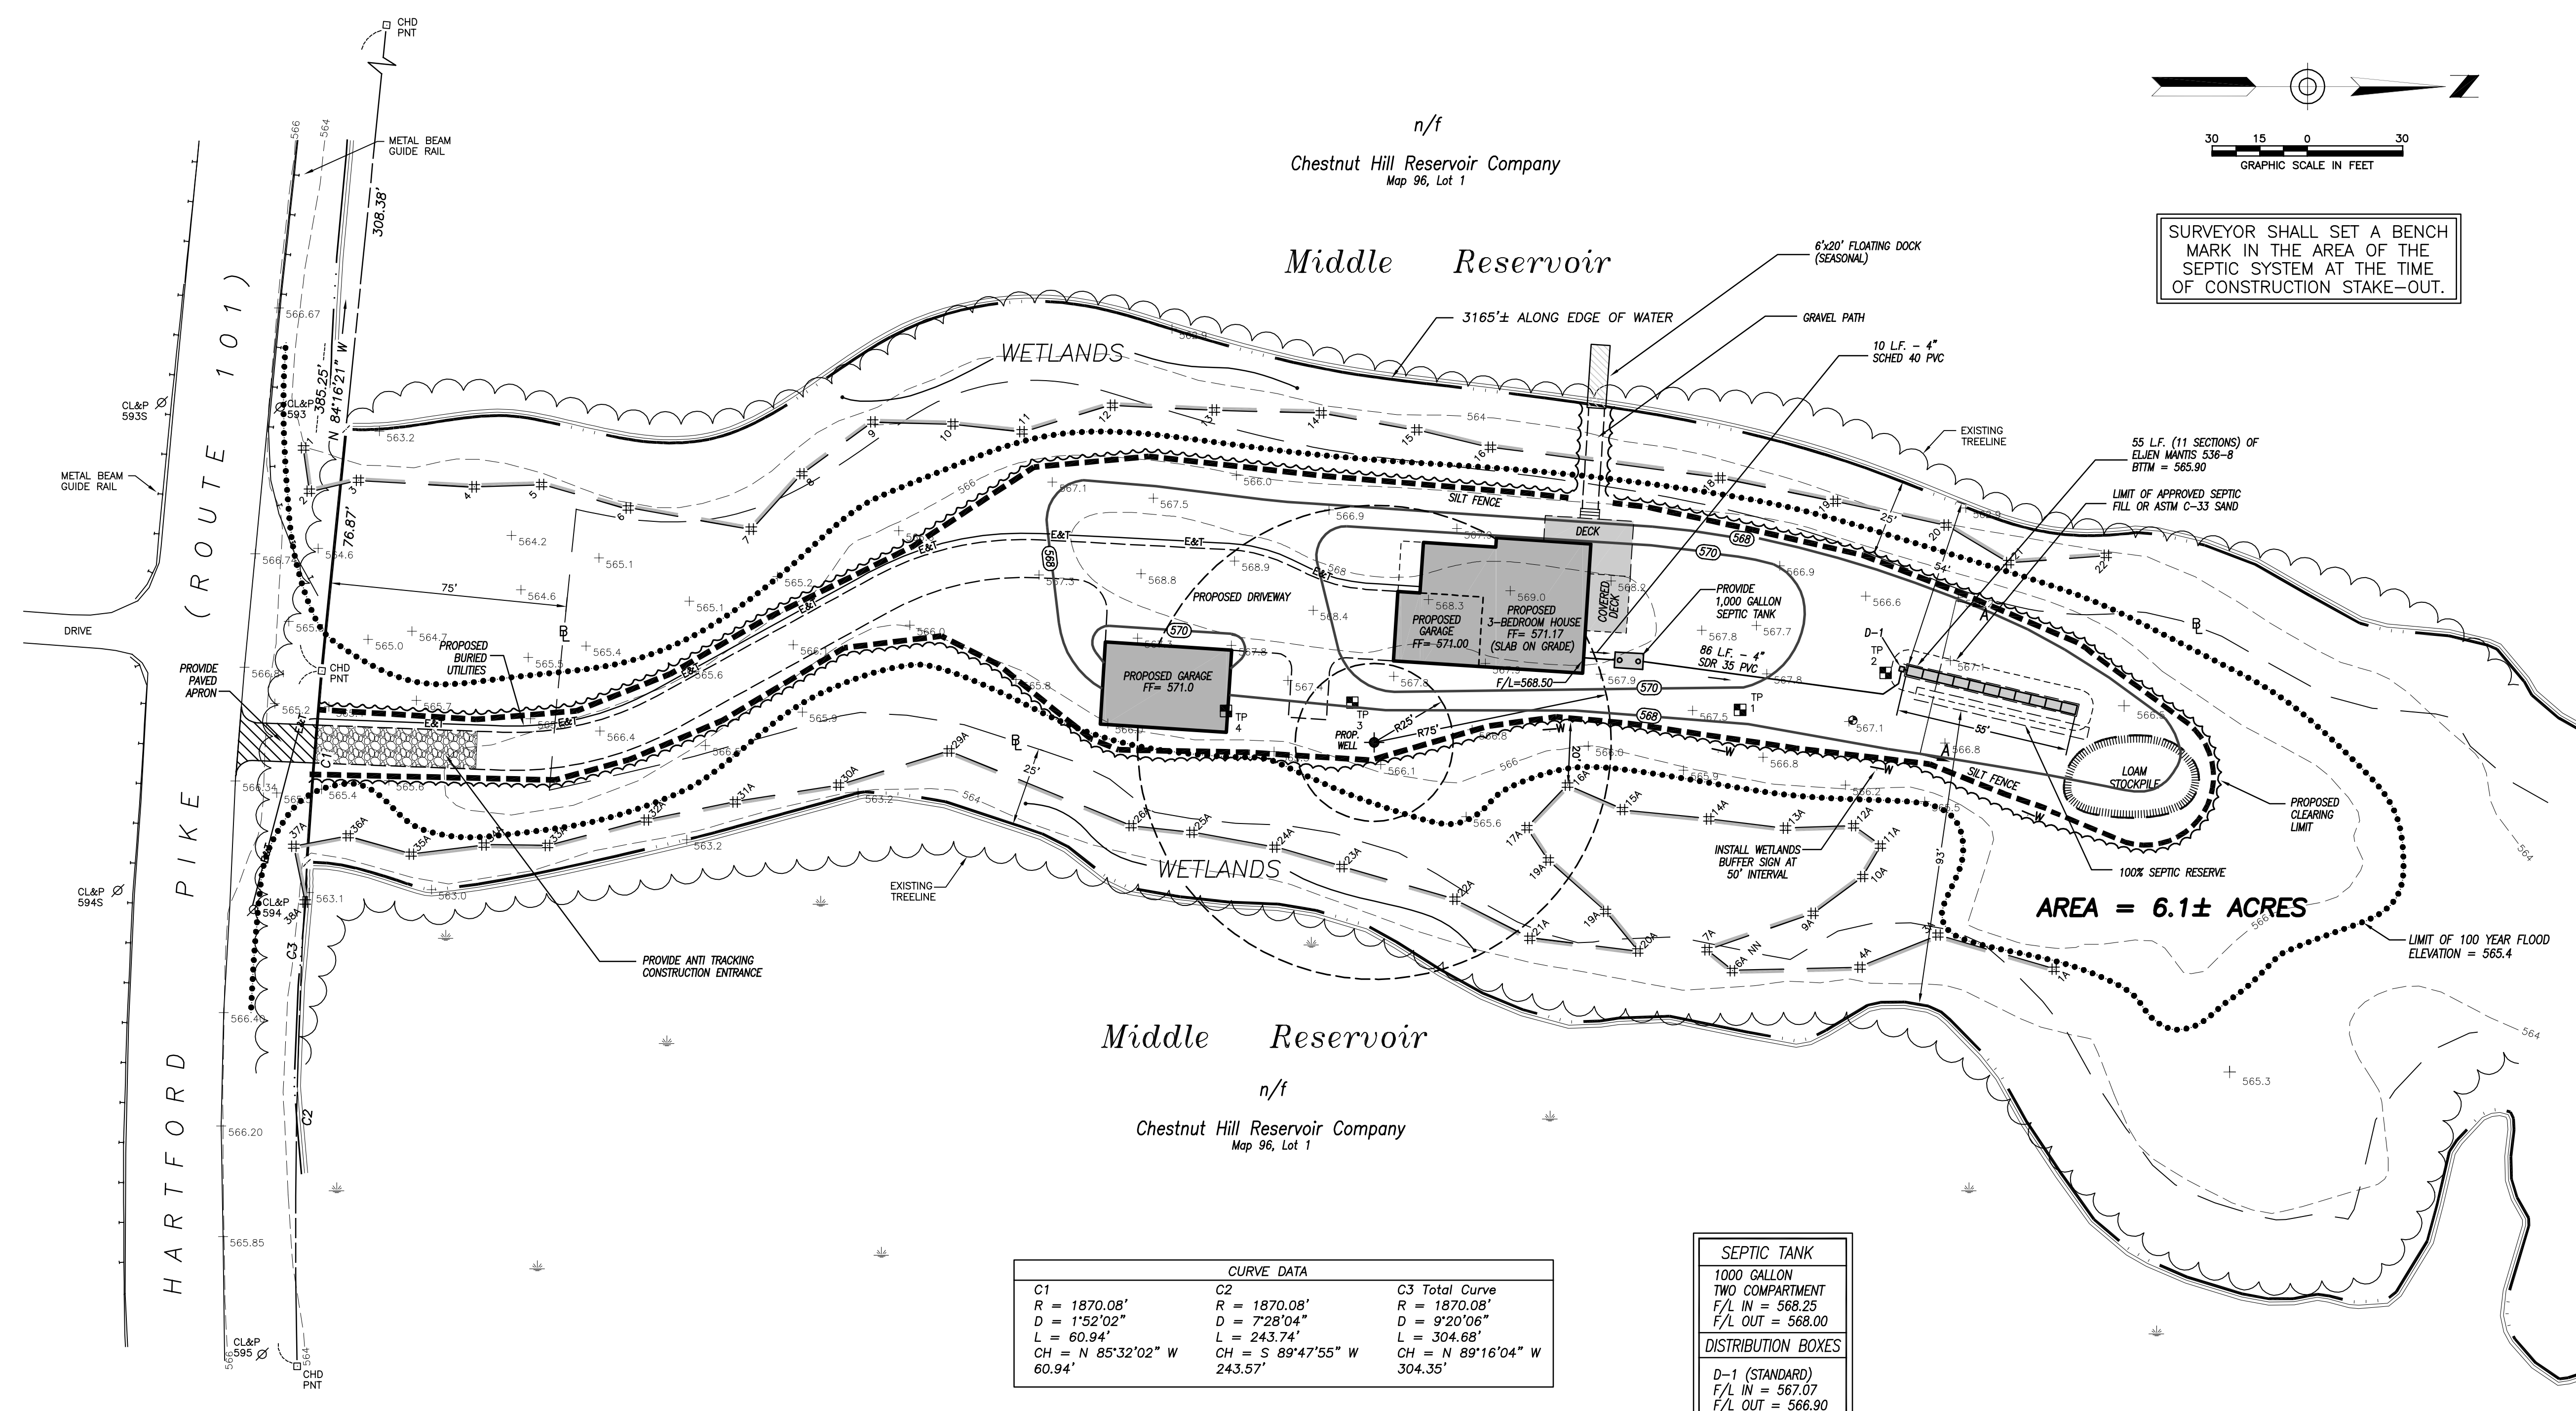


TEST HOLE DATA - April 8, 2020
 Northeast District Department of Health

TEST PIT	DEPTH	PROFILE	TEST PIT	DEPTH	PROFILE
1	0'-7" 7'-32" 32'-45" 45'-90" Ledge GWT Mottling	Organics/topsoil Red-brown loamy sand Light gray VF sandy loam; mottled Dark gray compact pan N/A 84" (seeps @ 80") 33"	3	0'-8" 8'-33" 33'-43" 43'-86" Ledge GWT Mottling	Organics/topsoil Red-brown loamy sand Light gray VF sandy loam; mottled Dark gray compact pan N/A 80" (seeps @ 74") 33"
2	0'-6" 6'-31" 31'-42" 42'-72" Ledge GWT Mottling	Organics/topsoil Red-brown loamy sand Light gray VF sandy loam; mottled Dark gray compact pan N/A N/A N/A 36"	4	0'-7" 7'-28" 28'-40" 40'-72" Ledge GWT Mottling	Organics/topsoil Red-brown loamy sand Light gray VF sandy loam; mottled Dark gray compact pan N/A 60" (seeps @ 51") 31"

SEPTIC SYSTEM DESIGN DATA

- Percolation Rate = 5.0 min. / in.
- 3 bedroom house requires = 495 s.f. effective leaching area
- Effective Leaching area = 11.0 s.f. / l.f. of Eljen Mantis 536-8
- Length Required = 495/11.0 = 45 l.f.
- Length Provided = 55 l.f.
- Min. Leaching System Spread (MLSS) = 30 x 1.5 x 1.0 = 45'
- MLSS Provided = 55'
- LEACHING FIELD
- One - 55' row (11 sections) of Eljen Mantis 536-8 septic leaching units
- Maximum depth into existing grade = 15"

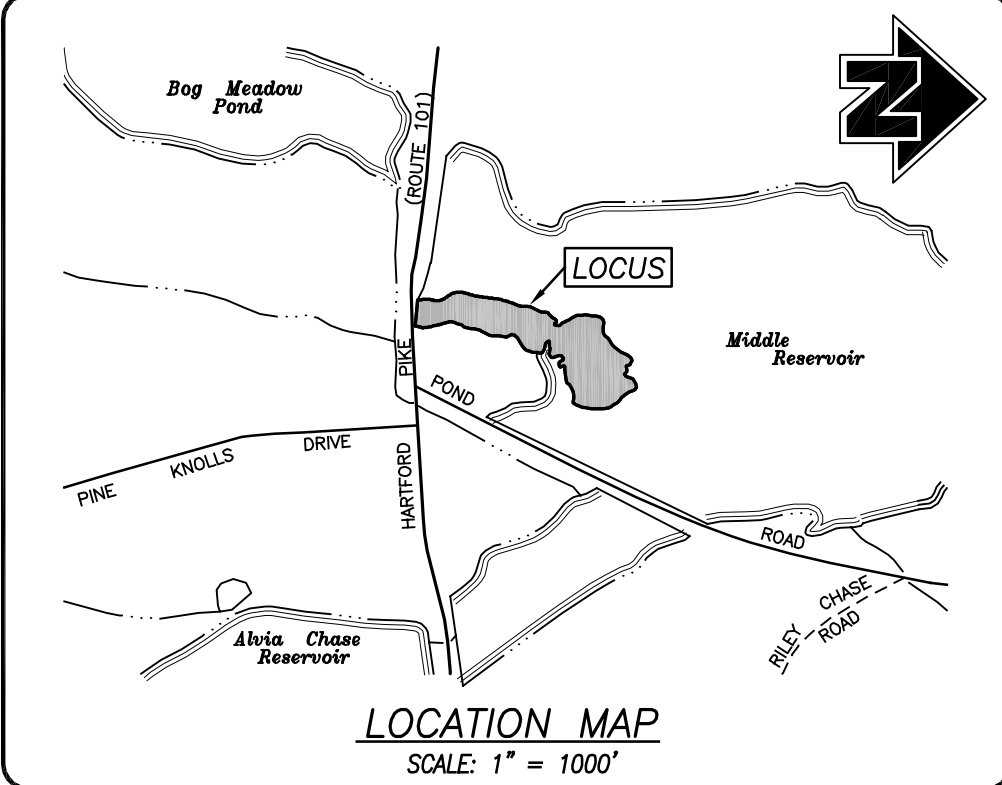

SURVEYOR SHALL SET A BENCH MARK IN THE AREA OF THE SEPTIC SYSTEM AT THE TIME OF CONSTRUCTION STAKE-OUT.

- NOTES:
- This survey has been prepared pursuant to the Regulations of Connecticut State Agencies Sections 20-300b-1 through 20-300b-20 and the "Standards for Surveys and Maps in the State of Connecticut" as adopted by the Connecticut Association of Land Surveyors, Inc. on September 26, 1996;
 - This survey conforms to a Class "A-2" horizontal accuracy.
 - Topographic features conform to a Class "T-2", "V-2" vertical accuracy.
 - Survey Type: Improvement Location Survey.
 - Boundary Determination Category: First Survey.
 - Zone = RD.
 - Owner of record: Richard R. O'Keefe
 P.O. Box 26
 Danielson, CT 03239
 Vol. 1370, Pg. 372
 - Parcel is shown as Lot #1 on Assessors Map #99.
 - Elevations shown are based on North American Vertical Datum of 1988 (NAVD 88). Contours taken from the Town of Killingly's GIS data and supplemented with actual field survey. Contour interval = 2'.
 - North orientation, bearings and coordinate values shown are based on North American Datum of 1983 (NAD 83) and are taken from GPS readings.
 - Test Pit data taken from NDDH file number 20000236.
 - Wetlands shown were delineated in the field by Joseph Theroux, Certified Soil Scientist, in March 2020.
 - Parcel lies within Flood Hazard Zone 'A' (areas of 100 year flood base elevations and flood hazard factors not determined) as shown on FIRM Map #090136 Panel 0010B Effective Date: January 3, 1985.
 - Before any construction is to commence contact "CALL BEFORE YOU DIG" at 1-800-922-4455 or 811.
- MAP REFERENCE:
- "Connecticut State Highway Department - Right of Way Map - Town of Killingly - Killingly-East Killingly Road - From Ballouville Road Easterly to the Rhode Island State Line - Route No. 101 Scale: 1" = 40' - Date: April 29, 1938 - Number 68-07 - Sheet No. 4 of 5."
 - "Property Survey - Prepared for - Richard R. O'Keefe - 1496 Hartford Pike (Route 101) - Killingly, Connecticut - Scale: 1" = 50' Date: 6/30/2020 - Revised to: 10/20/2020 - Sheet 1 of 1 - Prepared by: Killingly Engineering Associates." On file in the Killingly Land Records as Map #7246.

CURVE DATA

C1	C2	C3 Total Curve
R = 1870.08'	R = 1870.08'	R = 1870.08'
D = 1'52'02"	D = 7'28'04"	D = 9'20'06"
L = 60.94'	L = 243.74'	L = 304.68'
CH = N 85°32'02" W 60.94'	CH = S 89°47'55" W 243.57'	CH = N 89°16'04" W 304.35'

SEPTIC TANK
 1000 GALLON
 TWO COMPARTMENT
 F/L IN = 568.25
 F/L OUT = 568.00
 DISTRIBUTION BOXES
 D-1 (STANDARD)
 F/L IN = 567.07
 F/L OUT = 566.90

- LEGEND
- F.F. FINISHED FLOOR
 - CHD PNT CHD MONUMENT POINT
 - UTILITY POLE
 - EXISTING CONTOURS
 - PROPOSED CONTOURS
 - INLAND WETLANDS FLAG
 - BUILDING SETBACK LINE
 - PERCOLATION TEST HOLE
 - TEST HOLE
 - SILT FENCE

I HAVE REVIEWED THE FLAGGED INLAND WETLANDS LOCATION SHOWN ON THIS PLAN AND THEY APPEAR TO BE SUBSTANTIALLY CORRECT.

Certified Soil Scientist Date

NORMAND THIBEAULT, JR., P.E. No. 22834 DATE

TO MY KNOWLEDGE AND BELIEF, THIS MAP IS SUBSTANTIALLY CORRECT AS NOTED HEREON,

GREG A. GLAUDE, L.S. LIC. NO. 70191 DATE

NO CERTIFICATION IS EXPRESSED OR IMPLIED UNLESS THIS MAP BEARS THE ORIGINAL SEAL AND SIGNATURE OF THE LAND SURVEYOR.

APPROVED BY THE TOWN OF KILLINGLY INLAND WETLANDS COMMISSION

CHAIRMAN DATE

ANY CHANGES TO THESE PLANS WITHIN 200' OF WETLANDS OR WATERCOURSES MUST BE RESUBMITTED TO THE KILLINGLY INLAND WETLANDS AND WATERCOURSES COMMISSION FOR ITS APPROVAL.

THE APPLICANT WILL CONTACT THE KILLINGLY INLAND WETLANDS AND WATERCOURSES COMMISSION'S AGENT AFTER ALL EROSION AND SEDIMENT CONTROL MEASURES ARE INSTALLED, PRIOR TO ANY CONSTRUCTION OR EXCAVATION ON THE PROPERTY.

DATE	REVISIONS
12/16/2020	REVISED SYSTEM AND LOCATION

IMPROVEMENT LOCATION SURVEY
 SEPTIC SYSTEM DESIGN PLAN
 PREPARED FOR
RICHARD R. O'KEEFE
 1496 HARTFORD PIKE (ROUTE 101)
 KILLINGLY, CONNECTICUT

Killingly Engineering Associates
 Civil Engineering & Surveying

114 Westcott Road
 P.O. Box 421
 Killingly, Connecticut 06241
 (860) 779-7299
 www.killinglyengineering.com

DATE: 11/17/2020 DRAWN: AMR
 SCALE: 1" = 30' DESIGN: NET
 SHEET: 1 OF 2 CHK BY: GG
 DWG. NO: CLIENT FILE JOB NO: 20055

EROSION AND SEDIMENT CONTROL NARRATIVE:

PRINCIPLES OF EROSION AND SEDIMENT CONTROL

The primary function of erosion and sediment controls is to absorb erosional energies and reduce runoff velocities that force the detachment and transport of soil and/or encourage the deposition of eroded soil particles before they reach any sensitive area.

KEEP LAND DISTURBANCE TO A MINIMUM

The more land that is in vegetative cover, the more surface water will infiltrate into the soil, thus minimizing stormwater runoff and potential erosion. Keeping land disturbance to a minimum not only involves minimizing the extent of exposure at any one time, but also the duration of exposure. Phasing, sequencing and construction scheduling are interrelated. Phasing divides a large project into distinct sections where construction work over a specific area occurs over distinct periods of time and each phase is not dependent upon a subsequent phase in order to be functional. A sequence is the order in which construction activities are to occur during any particular phase. A sequence should be developed on the premise of "first things first" and "last things last" with proper attention given to the inclusion of adequate erosion and sediment control measures. A construction schedule is a sequence with time lines applied to it and should address the potential overlap of actions in a sequence which may be in conflict with each other.

- Limit areas of clearing and grading. Protect natural vegetation from construction equipment with fencing, tree armoring, and retaining walls or tree wells.
- Route traffic patterns within the site to avoid existing or newly planted vegetation.
- Phase construction so that areas which are actively being developed at any one time are minimized and only that area under construction is exposed. Clear only those areas essential for construction.
- Sequence the construction of storm drainage systems so that they are operational as soon as possible during construction. Ensure all outlets are stable before outletting storm drainage flow into them.
- Schedule construction so that final grading and stabilization is completed as soon as possible.

SLOW THE FLOW

Detachment and transport of eroded soil must be kept to a minimum by absorbing and reducing the erosive energy of water. The erosive energy of water increases as the volume and velocity of runoff increases. The volume and velocity of runoff increases during development as a result of reduced infiltration rates caused by the removal of existing vegetation, removal of topsoil, compaction of soil and the construction of impervious surfaces.

- Use diversions, stone dikes, silt fences and similar measures to break flow lines and dissipate storm water energy.
- Avoid diverting one drainage system into another without calculating the potential for downstream flooding or erosion.

KEEP CLEAN RUNOFF SEPARATED

Clean runoff should be kept separated from sediment laden water and should not be directed over disturbed areas without additional controls. Additionally, prevent the mixing of clean off-site generated runoff with sediment laden runoff generated on-site until after adequate filtration of on-site waters has occurred.

- Segregate construction waters from clean water.
- Divert site runoff to keep it isolated from wetlands, watercourses and drainage ways that flow through or near the development until the sediment in that runoff is trapped or detained.

REDUCE ON SITE POTENTIAL INTERNALLY AND INSTALL PERIMETER CONTROLS

While it may seem less complicated to collect all waters to one point of discharge for treatment and just install a perimeter control, it can be more effective to apply internal controls to many small sub-drainage basins within the site. By reducing sediment loading from within the site, the chance of perimeter control failure and the potential off-site damage that it can cause is reduced. It is generally more expensive to correct off-site damage than it is to install proper internal controls.

- Control erosion and sedimentation in the smallest drainage area possible. It is easier to control erosion than to contend with sediment after it has been carried downstream and deposited in unwanted areas.
- Direct runoff from small disturbed areas to adjoining undisturbed vegetated areas to reduce the potential for concentrated flows and increase settlement and filtering of sediments.
- Concentrated runoff from development should be safely conveyed to stable outlets using rip rapped channels, waterways, diversions, storm drains or similar measures.
- Determine the need for sediment basins. Sediment basins are required on larger developments where major grading is planned and where it is impossible or impractical to control erosion at the source. Sediment basins are needed on large and small sites when sensitive areas such as wetlands, watercourses, and streets would be impacted by off-site sediment deposition. Do not locate sediment basins in wetlands or permanent or intermittent watercourses. Sediment basins should be located to intercept runoff prior to its entry into the wetland or watercourse.

SEPTIC SYSTEM CONSTRUCTION NOTES


- The building, septic system and well shall be accurately staked in the field by a licensed Land Surveyor in the State of Connecticut, prior to construction.
- Topsoil shall be removed and in the area of the primary leaching field scarified, prior to placement of septic fill. Septic fill specifications are as follows:
 - Max. percent of gravel (material between No. 4 & 3 inch sieves) = 45%

SIEVE SIZE	GRADATION OF FILL (MINUS GRAVEL)	
	PERCENT PASSING (WET SIEVE)	PERCENT PASSING (DRY SIEVE)
No. 4	100%	100%
No. 10	70% - 100%	70% - 100%
No. 40	10% - 50%	10% - 75%
No. 100	0% - 20%	0% - 5%
No. 200	0% - 5%	0% - 2.5%


Fill material shall be approved by the sanitarian prior to placement. It shall be compacted in 6" lifts and shall extend a minimum of five feet (5') around the perimeter of the system. Common fill shall extend an additional five feet (5') down gradient of the system (10' total) before tapering off at a maximum slope of 2H:1V.

- Septic tank shall be two compartment precast 1000 gallon tank with gas deflector and outlet filter as manufactured by Jolley Precast, Inc. or equal.
- Distribution boxes shall be 4 hole precast concrete as manufactured by Jolley Precast, Inc. or equal.
- All precast structures such as septic tanks, distribution boxes, etc. shall be set level on six inches (6") of compacted gravel base at the elevations specified on the plans.
- Solid distribution pipe shall be 4" diameter PVC meeting ASTM D-3034 SDR 35 with compression gasket joints. It shall be laid true to the lines and grades shown on the plans and in no case have a slope less than 0.125 inches per foot.
- Perforated distribution pipe shall be 4" diameter PVC meeting ASTM D-3034 or ASTM F1760 for SDR 35, or ASTM F810 for SDR 38.
- Sewer pipe from the foundation wall to the septic tank shall be schedule 40 PVC meeting ASTM D 1785. It shall be laid true to the grades shown on the plans and in no case shall have a slope less than 0.25 inches per foot.
- Solid footing drain outlet pipe shall be 4" Diameter PVC meeting ASTM D 3034, SDR 35 with compression gasketed joints. Footing drain outlet pipe shall not be backfilled with free draining material, such as gravel, broken stone, rock fragments, etc.
- Septic sand shall meet the requirements of ASTM C-33 with less than 10% passing a 100 sieve and less than 5% passing a 200 sieve


SIEVE SIZE	% PASSING
0.375	100
#4	95-100
#8	80-100
#16	60-85
#30	25-60
#50	10-30
#100	<10
#200	<5

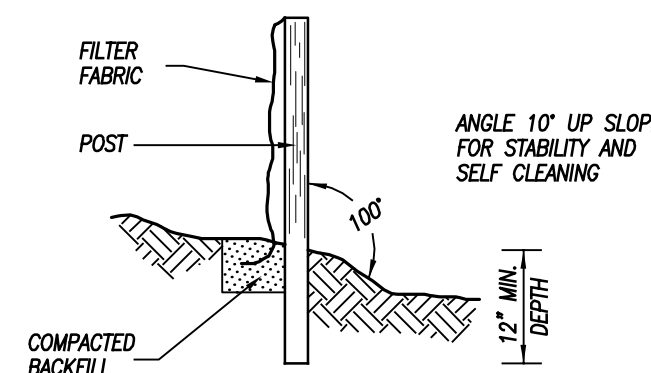


SILT FENCE
NOT TO SCALE

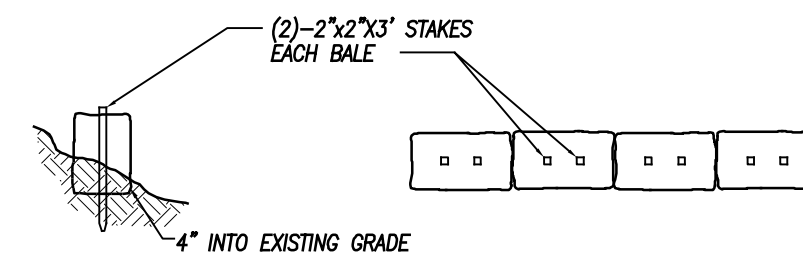

HAYBALE BARRIER
NOT TO SCALE

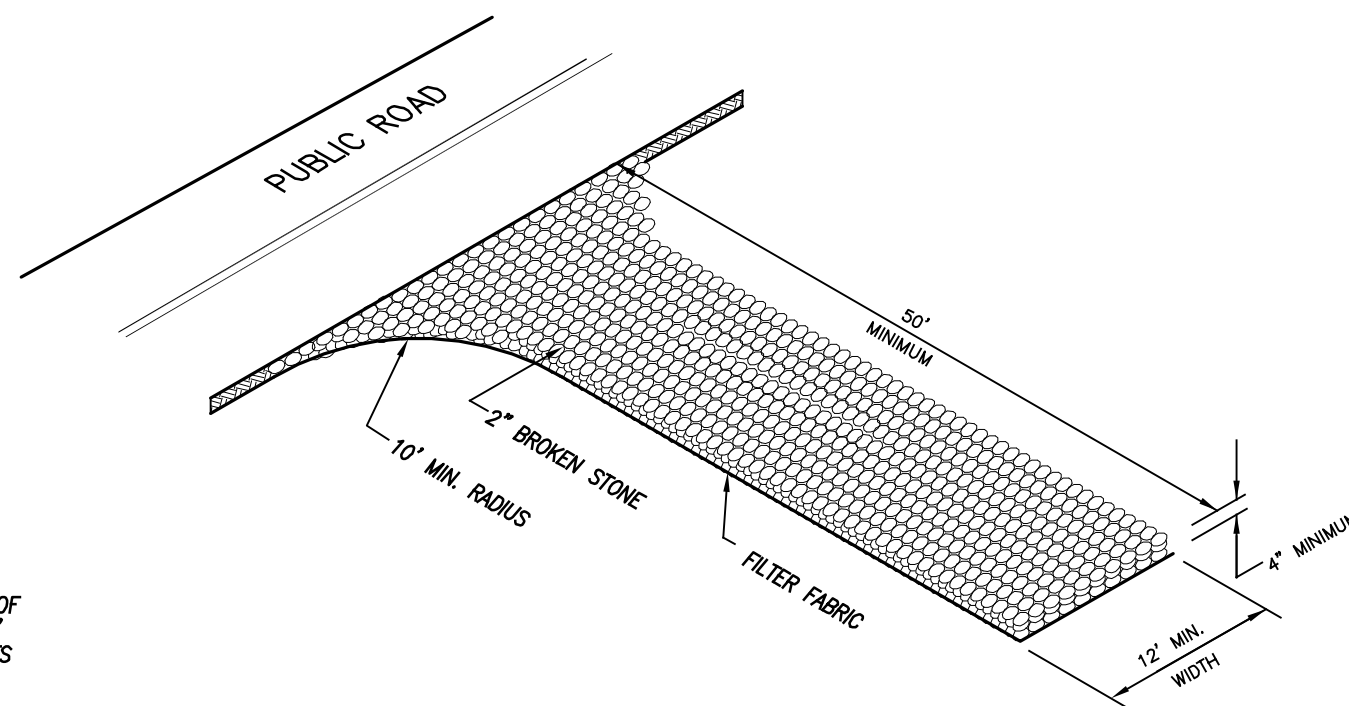


ANTI-TRACKING PAD
NOT TO SCALE


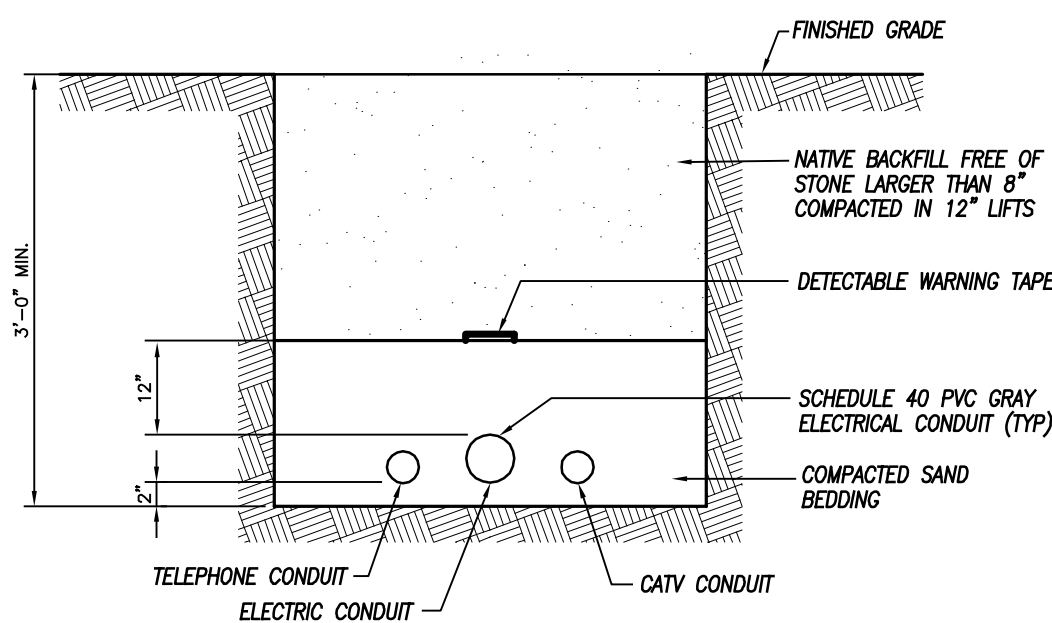


NOTE: CONTRACTOR SHALL PROVIDE SILT/CLAY DAMS AT 100' INTERVALS ALONG PROPOSED UTILITY TRENCH TO AVOID TRANSPORTING INTERCEPTED WATER.

UNDERGROUND UTILITY TRENCH
NOT TO SCALE


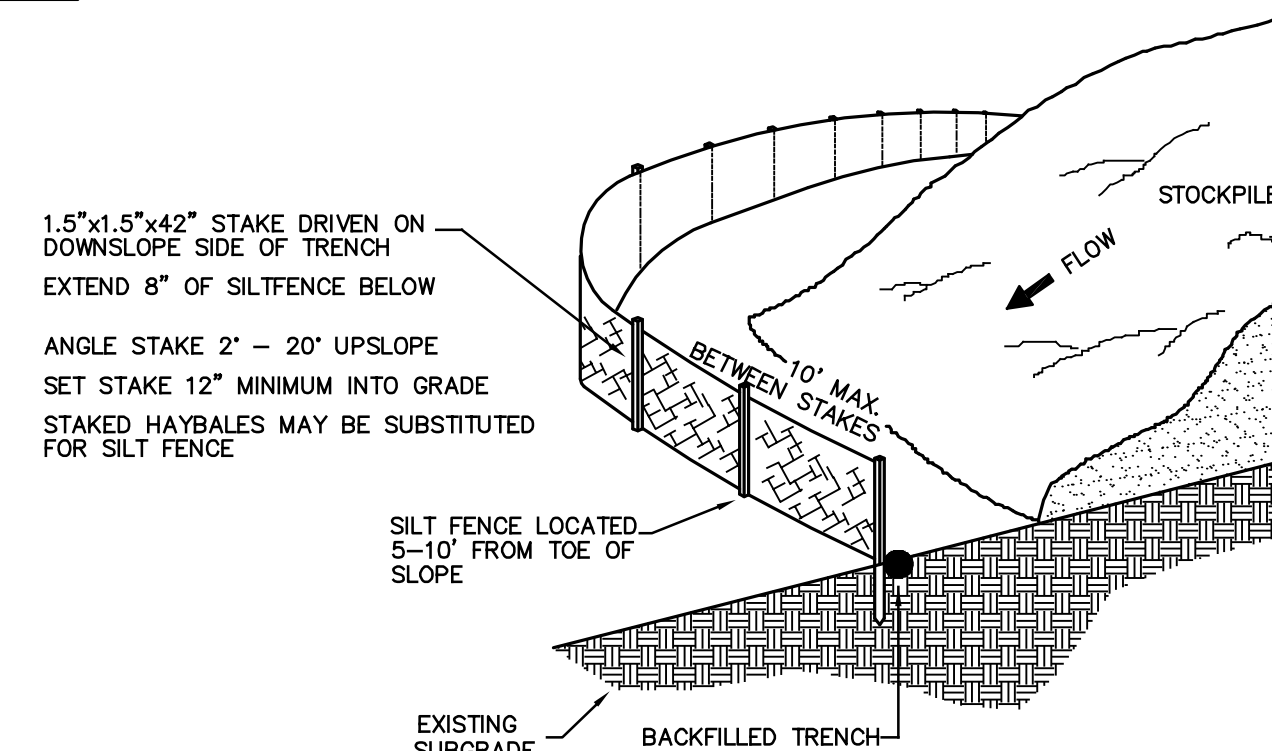


SILT FENCE @ TOE OF SLOPE APPLICATION
NOT TO SCALE

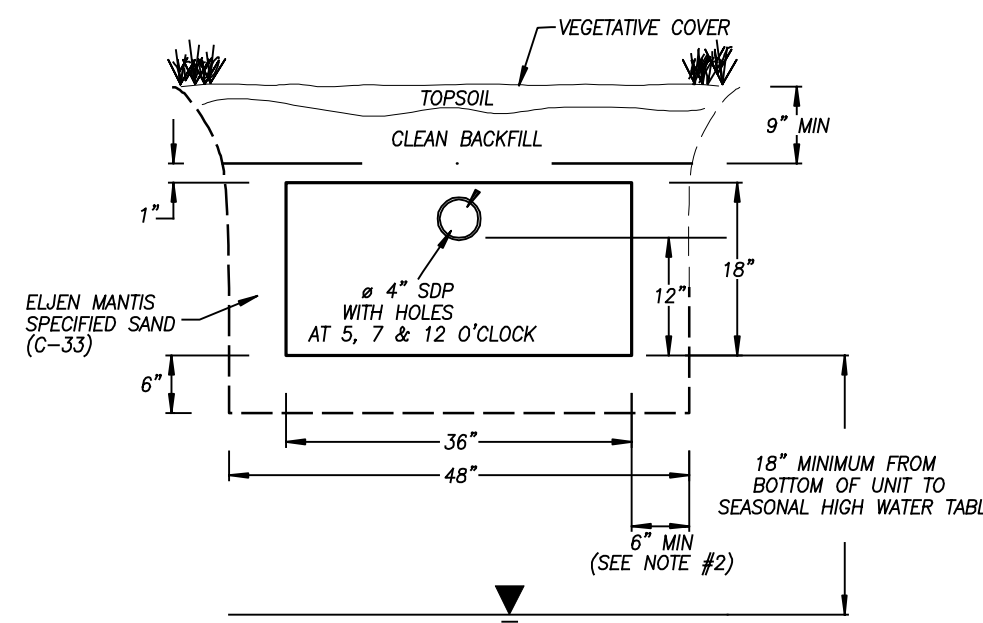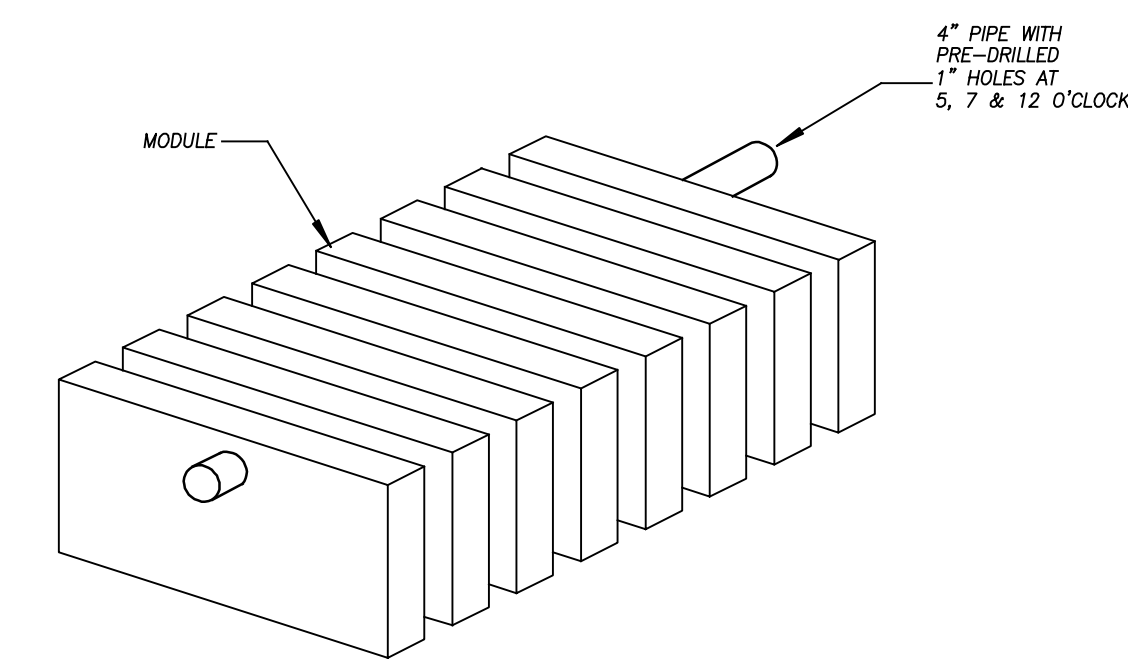


- NOTES:
- VENTING REQUIRED WHEN MORE THAN 18" OF COVER AS MEASURED FROM THE TOP OF THE UNIT TO FINISHED GRADE.
 - FOR SYSTEMS INSTALLED IN FILL, CONTRACTOR SHALL PROVIDE 5" OF SELECT FILL OR ASTM C-33 SAND 5" AROUND PERIMETER OF SYSTEM.

ELJEN 536-8 WASTEWATER LEACHING SYSTEM

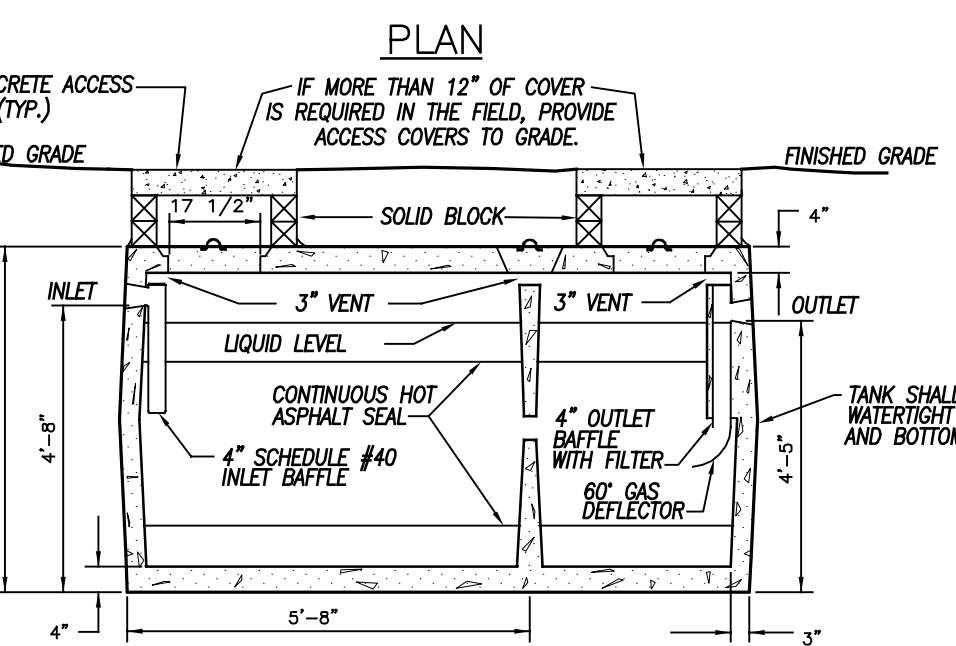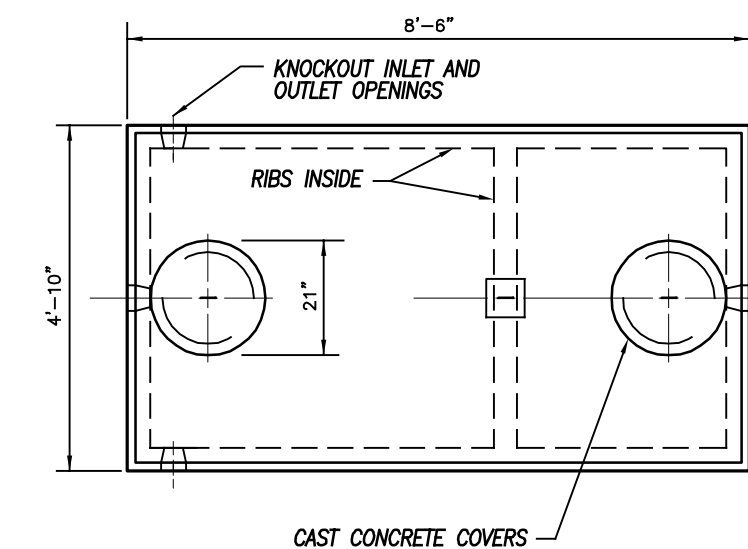


CROSS SECTION


1000 GALLON 2 COMPARTMENT SEPTIC TANK
NOT TO SCALE

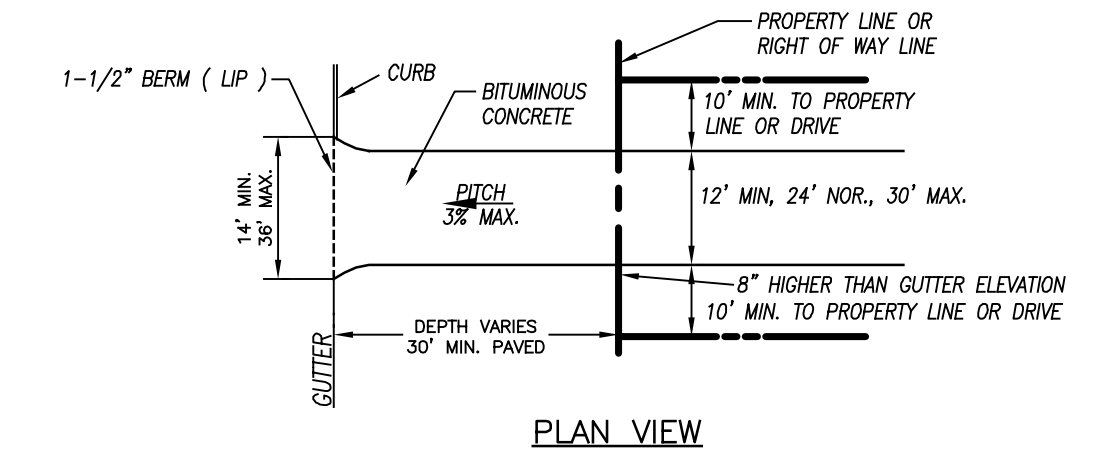

PLAN VIEW

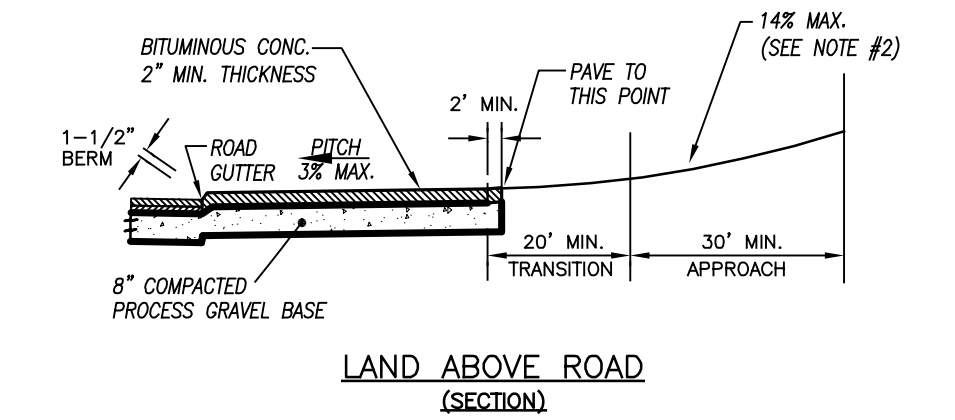


LAND ABOVE ROAD (SECTION)

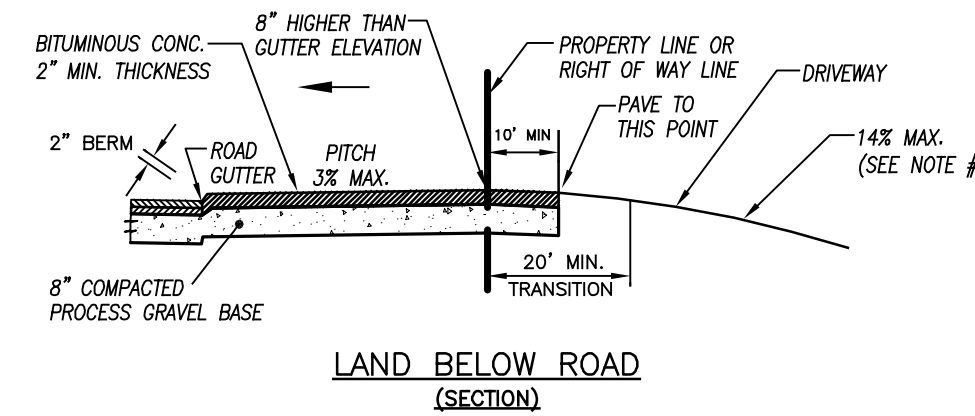

LAND BELOW ROAD (SECTION)

- THE ABOVE DETAIL IS ILLUSTRATIVE ONLY AND DOES NOT APPLY TO EVERY SITUATION. REVIEW YOUR DRIVEWAY PERMIT FOR YOUR SPECIFIC REQUIREMENTS.
- DRIVEWAYS IN EXCESS OF 10% GRADE, AND ALL COMMON (SHARED) DRIVEWAYS SHALL BE PAVED WITH BITUMINOUS CONCRETE.

STANDARD DRIVE DETAIL
NOT TO SCALE

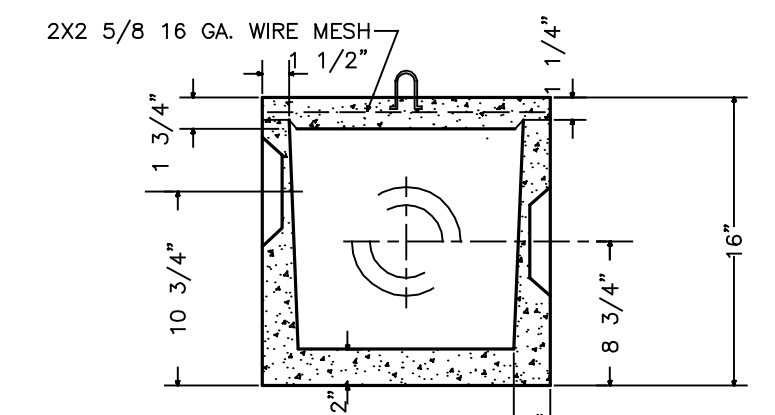

STANDARD D-BOX
NOT TO SCALE

12/16/2020	REVISED SEPTIC AND LOCATION
DATE	DESCRIPTION

DETAIL SHEET
PREPARED FOR

RICHARD R. O'KEEFE

1496 HARTFORD PIKE (ROUTE 101)
KILLINGLY, CONNECTICUT

Killingly Engineering Associates
Civil Engineering & Surveying

114 Westcott Road
P.O. Box 421
Killingly, Connecticut 06241
(860) 779-7299
www.killinglyengineering.com

DATE: 11/17/2020	DRAWN: AMR
SCALE: NOT TO SCALE	DESIGN: NET
SHEET: 2 OF 2	CHK BY: GG
DWG. No: CLIENT FILE	JOB No: 20055

Normand Thibault, Jr.
NORMAND THIBAUT, JR., P.E. No. 22834 DATE